

# **Guangzhou Best Electronic Technology co.,Ltd**

www.entelechyenergy.com

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China

## 1 Scope of application:

This product specification specification of the product size, performance, test methods are standardized, as the basis of technical confirmation.

#### 2 General Specification:

# 2.1 Scope of application

The products can be used in solar modules, solar power generation systems, solar application products and other fields.

#### 2.2 Standard test conditions

The test condition of this product is AM1.5, 1000W/m², 25°C

### 3, General Specification

Item		Specification/Condition
01	Part №	BST-330W-36P
02	(solar cell)	MULTI
03	Pmax	330W
04	Voc (V)	43. 2
05	Isc(A)	9. 63
06	Vmp (V)	36
07	Imp(A)	9. 17
08	operating temperature	-45°C-+85°C
09	Power Tolerance	±5%
10	Max. Power Temp.	-(0.5±0.05)%/℃
11	Open circuit Voltage Temp.	-(160±10)mV/°C
12	Shot circuit current Temp.	(0.065±0.015)%/℃
13	Max. System Voltage(V)	600V

#### 4. Mechanical Properties

SIZE: L1950mm(长) xW990 mm(宽) x H40mm(高)

Weight: 27.3 kg

Battery Specification: 72PCS (157\*157mm MULTI) 6\*12

Frame: Anodized aluminum frame



## **Guangzhou Best Electronic Technology co.,Ltd**

www.entelechyenergy.com


Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China Structure: Front: 3.2mm high transmittance toughened glass sealing material: EVA Back: PET/TPT

## 3 Use and storage environment conditions

- 1. Storage environment: -20°C-60°C
- 2. Use in outdoor environment without shade under the sun
- 3. The temperature of the iron is  $360\pm5$  °C, and the welding time cannot exceed 3 seconds.

## 6 Points for Attention in Use

- A) It shall not exceed the power use range.
- B) Avoid scratching the surface with hard objects during use
- C) Can not bear bending force during transportation and assembly
- D) There shall be no contact with strong corrosive substances. If there is, it shall be cleaned immediately.
- E) When the solar panel is connected with electrical appliances, pay attention to whether the connecting wire is broken and whether the positive and negative poles are connected in reverse.

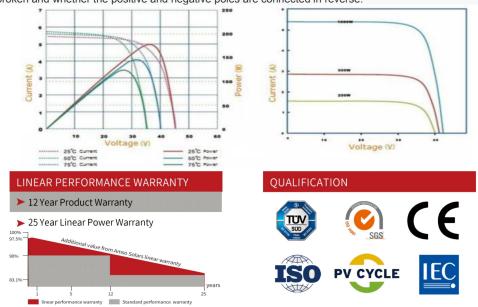

7、





# **Guangzhou Best Electronic Technology co.,Ltd**

www.entelechyenergy.com

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China



Front view Rear view