



1 Scope of application:

This product specification specification of the product size, performance, test methods are standardized, as the basis of technical confirmation.

2 General Specification:

2.1 Scope of application

The products can be used in solar modules, solar power generation systems, solar application products and other fields.

2.2 Standard test conditions

The test condition of this product is AM1.5, 1000W/m², 25°C

3 General Specification

PART NO.	BST-100W-18M	BST-120W-18M	BST-130W-18M	BST-150W-18M	BST-180W-18M
SOLAR CELL	MONO	MONO	MONO	MONO	MONO
P _{MAX}	100W	120W	130W	150W	180W
V _{OC} (V)	21.6	21.6	21.6	21.54	21.6
I _{SC} (A)	5.84	7	7.65	8.75	10.5
V _{MPP} (V)	18	18	18	18	18
I _{MPP} (A)	5.56	6.67	7.22	8.33	10
OPERATING TEMPERATURE	-45°C~+85°C	-45°C~+85°C	-45°C~+85°C	-45°C~+85°C	-45°C~+85°C
POWER TOLERANCE	±5%	±5%	±5%	±5%	±5%
MAX.POWER TEMP	-(0.5±0.05)%/°C	-(0.5±0.05)%/°C	-(0.5±0.05)%/°C	-(0.5±0.05)%/°C	-(0.5±0.05)%/°C
OPEN CIRCUIT VOLTAGE	-(160±10)mV/°C	-(160±10)mV/°C	-(160±10)mV/°C	-(160±10)mV/°C	-(160±10)mV/°C
SHOT CIRCUIT CURRENT	(0.065±0.015)%/°C	(0.065±0.015)%/°C	(0.065±0.015)%/°C	(0.065±0.015)%/°C	(0.065±0.015)%/°C
MAX.SYSTEM VOLTAGE(V)	1000V	1000V	1000V	1000V	1000V

4 Mechanical Properties

SIZE: L1470mm xW670mm xH35mm

Weight:13.5 kg

Battery Specification : 36PCS (156*156mm MONO)

Frame: Anodized aluminum frame

Structure: Front: 3.2mm high transmittance toughened glass sealing material: EVA Back: PET/TPT

5 Use and storage environment conditions

1. Storage environment: -20°C-60°C
2. Use in outdoor environment without shade under the sun
3. The temperature of the iron is 360±5°C, and the welding time cannot exceed 3 seconds.

6 Points for Attention in Use

- A) It shall not exceed the power use range.
- B) Avoid scratching the surface with hard objects during use
- C) Can not bear bending force during transportation and assembly
- D) There shall be no contact with strong corrosive substances. If there is, it shall be cleaned immediately.





Guangzhou Best Electronic Technology co.,Ltd

www.entelechenergy.com

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China


E) When the solar panel is connected with electrical appliances, pay attention to whether the connecting wire is broken and whether the positive and negative poles are connected in reverse.

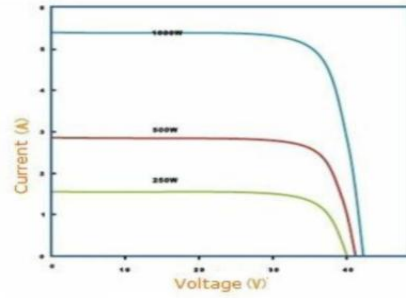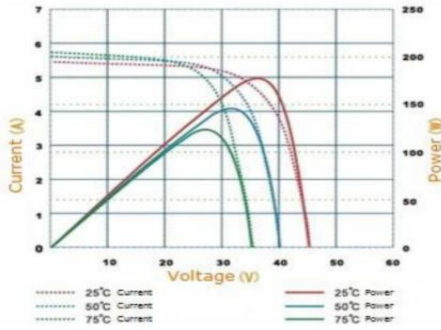

LINEAR PERFORMANCE WARRANTY

► 12 Year Product Warranty

► 25 Year Linear Power Warranty

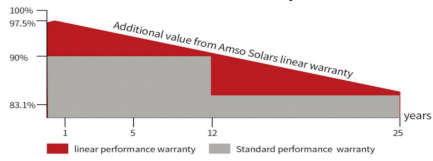

QUALIFICATION

