

# Guangzhou Best Electronic Technology co.,Ltd

www.entelechyenergy.com

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China

## **1** Scope of application:

This product specification specification of the product size, performance, test methods are standardized, as the basis of technical confirmation.

#### 2 General Specification:

## 2.1 Scope of application:

The products can be used in solar modules, solar power generation systems, solar application products and other fields.

#### 2.2 Standard test conditions:

### AM1.5 $\ 1000$ W/m<sup>2</sup> $\ 25^{\circ}$ C

The test condition of this product is AM1.5, 1000W/m<sup>2</sup>, 25°C

#### **3** General Specification

	ltem	Specification/Condition
01	Part №	BST-310W-30M
02	(solar cell)	MONO
03	Pmax	310W
04	Voc(V)	36
05	Isc(A)	10.85
06	Vmp(V)	30
07	Imp(A)	10. 33
08	operating temperature	-45℃-+85℃
09	Power Tolerance	±5%
10	Max.Power Temp.	-(0.5±0.05)%/°C
11	Open circuit Voltage Temp.	$-(160\pm10){ m mV}/{ m °C}$
12	Shot circuit current Temp.	(0.065±0.015)%/℃
13	Max.System Voltage(V)	1000V
14	(含增值税,不含运费)	765.00

#### 4 Mechanical Properties

SIZE: L1640mm xW990mm x H40mm



# Guangzhou Best Electronic Technology co.,Ltd

www.entelechyenergy.com

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China

Battery Specification : 60PCS (156\*156mm MONO) 6\*10

Frame: Anodized aluminum frame

Structure: Front: 3.2mm high transmittance toughened glass sealing material: EVA Back: PET/TPT

#### 5 Use and storage environment conditions

1. Storage environment:  $-20^{\circ}$ C -60  $^{\circ}$ C

- 2. Use in outdoor environment without shade under the sun
- 3. The temperature of the iron is 360±5  $^\circ\!\mathrm{C}$  , and the welding time cannot exceed 3 seconds.

#### 6 Points for Attention in Use


A) It shall not exceed the power use range.

B) Avoid scratching the surface with hard objects during use

- C) Can not bear bending force during transportation and assembly
- D) There shall be no contact with strong corrosive substances. If there is, it shall be cleaned immediately.

E) When the solar panel is connected with electrical appliances, pay attention to whether the connecting wire is

broken and whether the positive and negative poles are connected in reverse.

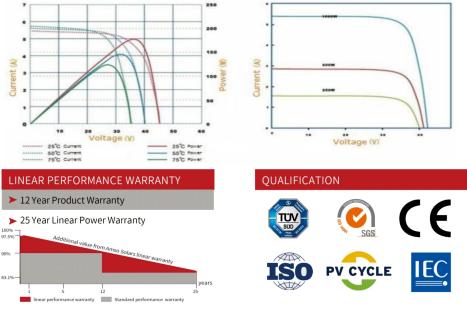



# Guangzhou Best Electronic Technology co.,Ltd

Address: 5/F, C District, No. 98, Road 9, Pacific Industrial Zone, Xintang Town, Zengcheng District, Guangzhou, China

